



- ✓ RIGHT PRODUCTS
- ✓ RIGHT PLACE
- ✓ RIGHT TIME

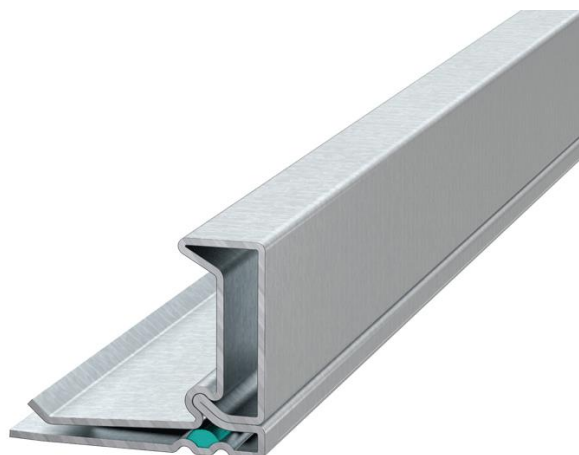

## Ductwork Flange - 20mm

Ductwork Flange, made from roll formed galvanised steel. Our ductwork flange and corners can be used as a framing system for manufacturing ductwork.

20mm & 30mm available in 2.5m lengths.

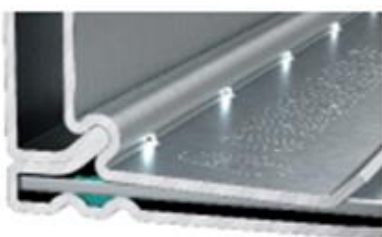


Technical data supplied by the manufacturer

Product name:	GEBHARDT Premium 20 D-Butyl
Field of application:	Slip-on duct flange with integral sealant for connecting rectangular ductwork
Material:	Strap steel 0,7 mm, zinc coated, according to DIN EN 10346
Sealant:	Gebhardt-Butyl
Weight:	0,548 kg/m
Production method:	Cold roll forming with injection of sealant
Certificates:	Tested to DIN EN 1507: 2006: Class D (TÜV-Nord certified) Tested to DW 144: Classes A, B, C and D Butyl sealant tested to DIN EN ISO 846 (According to VDI 6022)
Remarks:	Duct size less 32 mm: P20/3K, SL20/3, P20/3, SL20/3L, P20/3L, P20/3VH Duct size less ≤ 5 mm: D20/3VK, D20/3

**Remark:** This technical data sheet replaces all previous versions. The technical data contained herein is given in good faith and we cannot be held liable for any errors, inaccuracies, omissions or editorial failings. The information detailed in this technical data sheet is given by way of indication and is not exhaustive, users should contact either the seller or the manufacturer of the product for additional technical information concerning its use, if they think the information in their possession needs to be clarified in any way. Any illustrations shown are indicative only, and dimensions may differ slightly from batch to batch.


- ✓ RIGHT PRODUCTS
- ✓ RIGHT PLACE
- ✓ RIGHT TIME

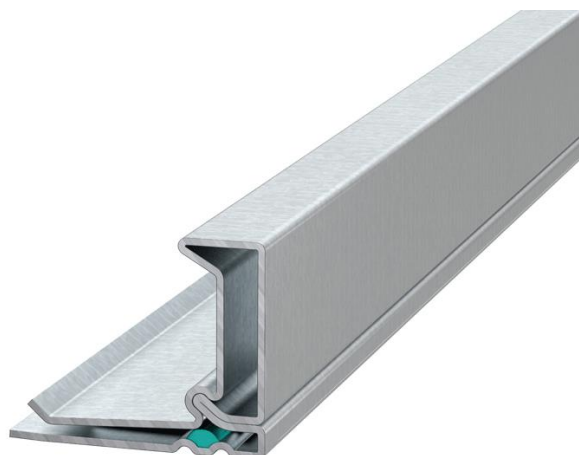

## Ductwork Flange - 30mm

Ductwork Flange, made from roll formed galvanised steel. Our ductwork flange and corners can be used as a framing system for manufacturing ductwork.

20mm & 30mm available in 2.5m lengths.

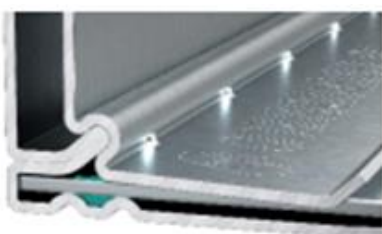

Technical data supplied by the manufacturer

Product name:	<b>GEBHARDT Premium 30 D-Butyl</b>
Field of application:	Slip-on duct flange with integral sealant for connecting rectangular ductwork
Material:	Strap steel 0,8 mm, zinc coated, according to DIN EN 10346
Sealant:	Gebhardt-Butyl
Weight:	0,74 kg/m
Production method:	Cold roll forming with injection of sealant
Certificates:	Tested to DIN EN 1507: 2006: Class D (TÜV-Nord certified) Tested to DW 144: Classes A, B, C and D Butyl sealant tested to DIN EN ISO 846 (According to VDI 6022)
Remarks:	Duct size less 32 mm: SL30/3K, SL30/3, SKL30/3, S30/4. S30/3H Duct size less ≤ 5 mm: SD30/V, SKD30/V

**Remark:** This technical data sheet replaces all previous versions. The technical data contained herein is given in good faith and we cannot be held liable for any errors, inaccuracies, omissions or editorial failings. The information detailed in this technical data sheet is given by way of indication and is not exhaustive, users should contact either the seller or the manufacturer of the product for additional technical information concerning its use, if they think the information in their possession needs to be clarified in any way. Any illustrations shown are indicative only, and dimensions may differ slightly from batch to batch.